



AKU 125 D


Art.no: [FAN000001](#) | Product category: Circular duct fans

Technical data


PACKING		FAN	
Weight	13.6 kg	Motor type	AC
ELECTRICAL DATA		IP Class	IP44
Rated power	170 W	Impeller type	Forwards curved
Rated current	0.73 A	CASING	
Phases	1N~ ~	Material	Galvanized steel
Voltage	230 V	Color	RAL 7040 (Grey)
Frequency	50 Hz	IP Class	IP44
		Operation environment	Indoors
		Operating air temperature	-40 .. 60 °C

Ecodesign

	Cold	Average	Warm	
SEC	-51.7	-24.7	-9.15	kWh/m ² a
Class	A+	C	F	
AEC	146	146	146	kWh/a
AHS	5536	2830	1280	kWh/a
Topology	NRVU / BVU			
Recovery type	-			
Type of drive	Multi-speed			
Maximum airflow	361		m ³ /h	
Fan power at max airflow	114		W	
Casing sound power level	44.5		dB(A)	
Reference airflow	0.07		m ³ /s	
Reference pressure	50		Pa	
SPI	0.22		W/(m ³ /h)	
Control factor	0.65			
Declared maximum external leakage rates	1		%	
ErP Compliance	2018			
Internet address for disassembly instructions	www.salda.lt			

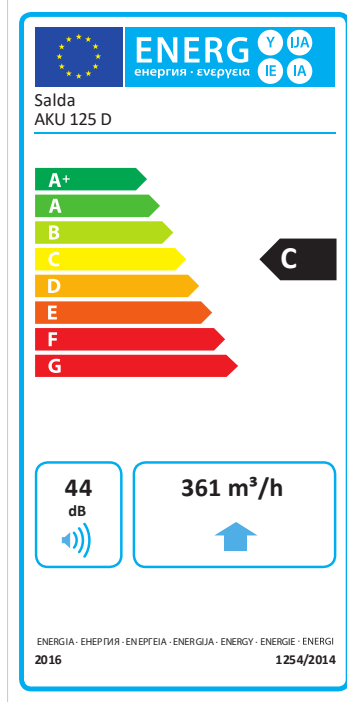

Dimensions

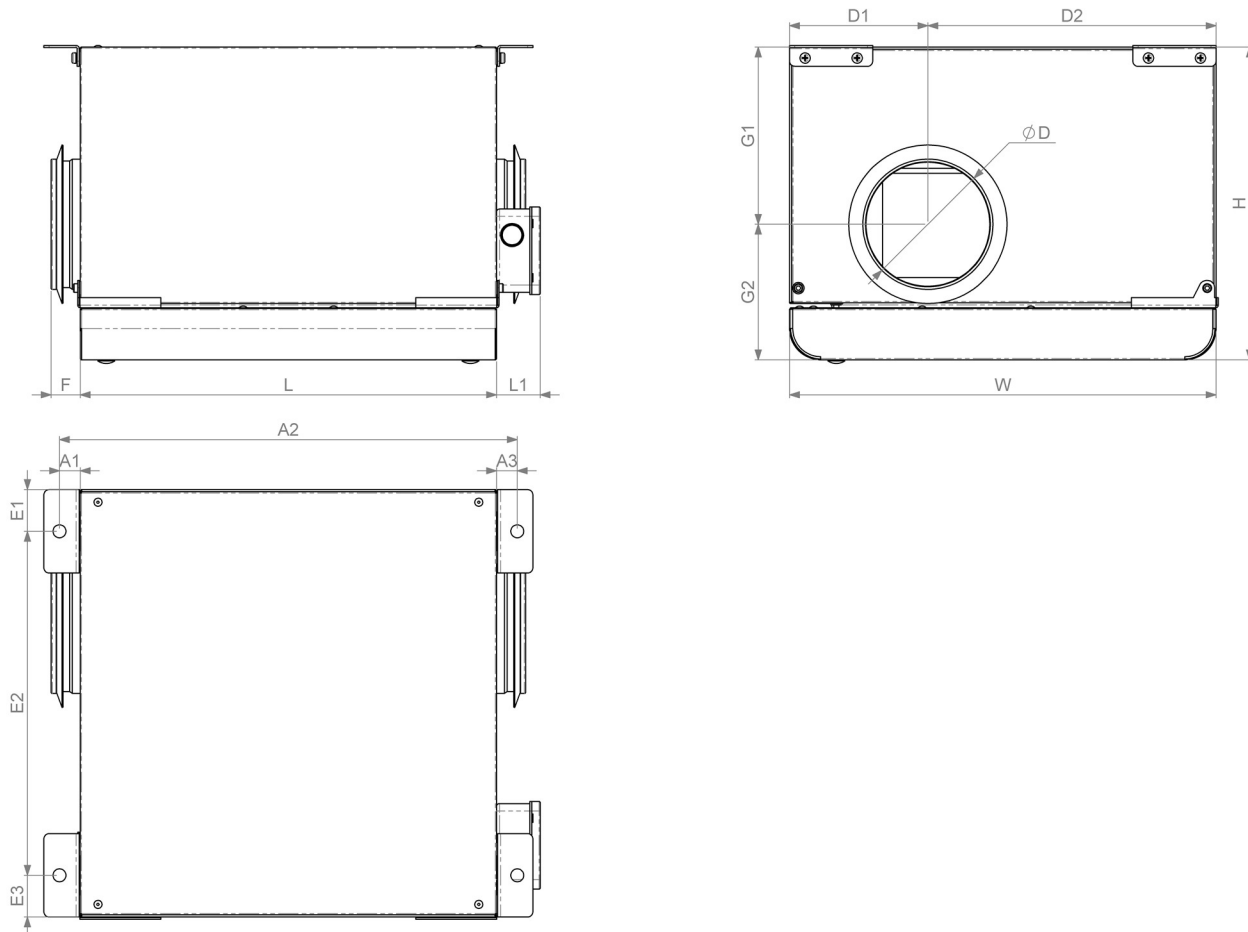

L [mm]	W [mm]	H [mm]	ØD [mm]	L1 [mm]	F [mm]	A1 [mm]	A2 [mm]	A3 [mm]	D1 [mm]	D2 [mm]	E1 [mm]
400	410	300	125	42	28	20	440	20	133	277	40
E2 [mm]	E3 [mm]	G1 [mm]	G2 [mm]								
330	40	170	130								