



## AKU 125 M

Art.no: [FAN000002](#) | Product category: Circular duct fans


### Technical data

PACKING	
Weight	12 kg
ELECTRICAL DATA	
Rated power	170 W
Rated current	0.37 A
Phases	1N~ ~
Voltage	230 V
Frequency	50 Hz


FAN	
Motor type	AC
IP Class	IP44
Impeller type	Forwards curved
CASING	
Material	Galvanized steel
Color	RAL 7040 (Grey)
IP Class	IP44
Operation environment	Indoors
Operating air temperature	-40 .. 60 °C

## Ecodesign

	Cold	Average	Warm	
<b>SEC</b>	-51.6	-24.5	-9.01	kWh/m <sup>2</sup> a
<b>Class</b>	A+	C	F	
<b>AEC</b>	151	151	151	kWh/a
<b>AHS</b>	5536	2830	1280	kWh/a
<b>Topology</b>	NRVU / BVU			
<b>Recovery type</b>	-			
<b>Type of drive</b>	Multi-speed			
<b>Maximum airflow</b>	197		m <sup>3</sup> /h	
<b>Fan power at max airflow</b>	72.6		W	
<b>Casing sound power level</b>	46.2		dB(A)	
<b>Reference airflow</b>	0.038		m <sup>3</sup> /s	
<b>Reference pressure</b>	50		Pa	
<b>SPI</b>	0.23		W/(m <sup>3</sup> /h)	
<b>Control factor</b>	0.65			
<b>Declared maximum external leakage rates</b>	1		%	
<b>ErP Compliance</b>	2018			
<b>Internet address for disassembly instructions</b>	www.salda.lt			

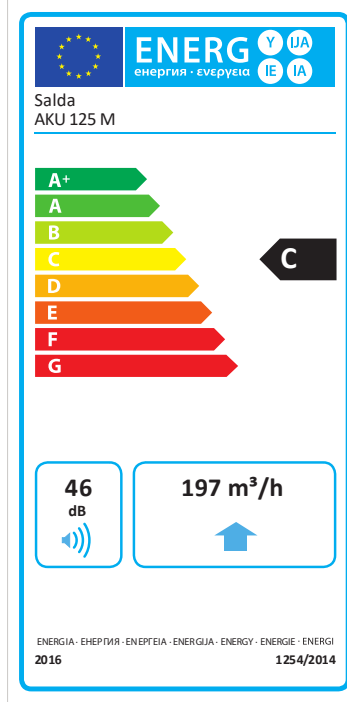

Dimensions

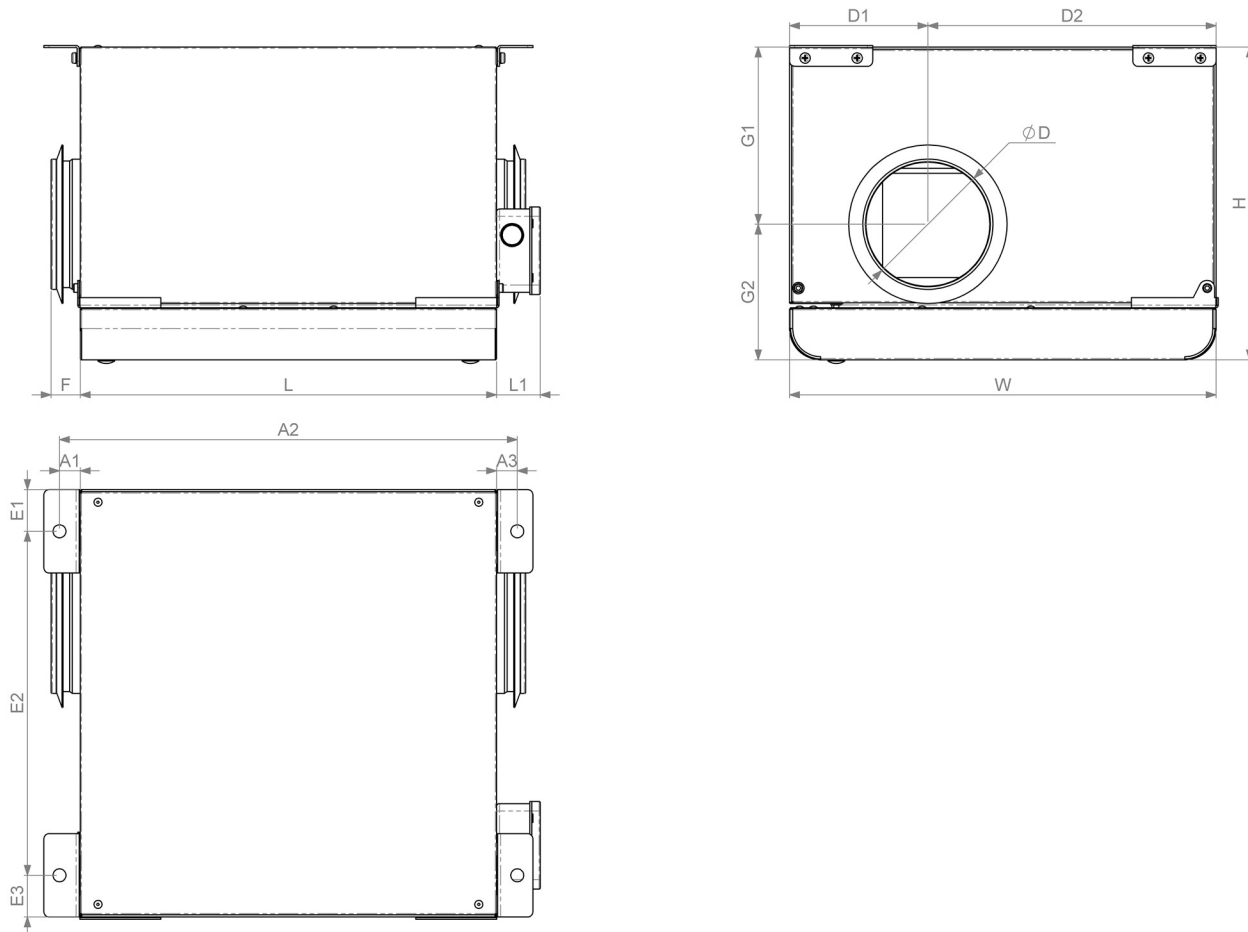

L [mm]	W [mm]	H [mm]	ØD [mm]	L1 [mm]	F [mm]	A1 [mm]	A2 [mm]	A3 [mm]	D1 [mm]	D2 [mm]	E1 [mm]
400	410	300	125	42	28	20	440	20	133	277	40
E2 [mm]	E3 [mm]	G1 [mm]	G2 [mm]								
330	40	170	130								