



AKU 160 M

Art.no: [FAN000004](#) | Product category: Circular duct fans


Technical data

PACKING	
Weight	13.5 kg
ELECTRICAL DATA	
Rated power	170 W
Rated current	0.73 A
Phases	1N~ ~
Voltage	230 V
Frequency	50 Hz


FAN	
Motor type	AC
IP Class	IP44
Impeller type	Forwards curved
CASING	
Material	Galvanized steel
Color	RAL 7040 (Grey)
IP Class	IP44
Operation environment	Indoors
Operating air temperature	-40 .. 60 °C

Ecodesign

	Cold	Average	Warm	
SEC	-51.6	-24.5	-8.99	kWh/m ² a
Class	A+	C	F	
AEC	152	152	152	kWh/a
AHS	5536	2830	1280	kWh/a
Topology	NRVU / BVU			
Recovery type	-			
Type of drive	Multi-speed			
Maximum airflow	409		m ³ /h	
Fan power at max airflow	127		W	
Casing sound power level	47		dB(A)	
Reference airflow	0.079		m ³ /s	
Reference pressure	50		Pa	
SPI	0.23		W/(m ³ /h)	
Control factor	0.65			
Declared maximum external leakage rates	1		%	
ErP Compliance	2018			
Internet address for disassembly instructions	www.salda.lt			

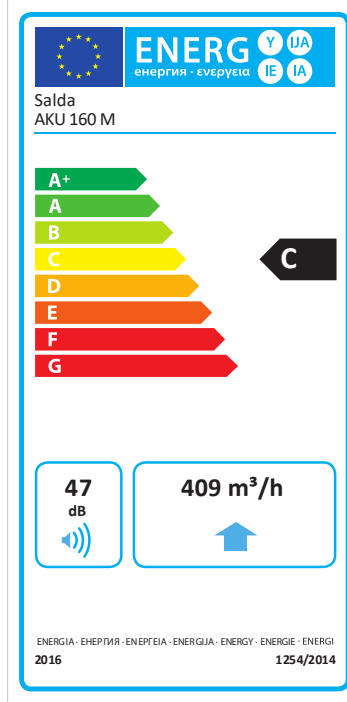

Dimensions

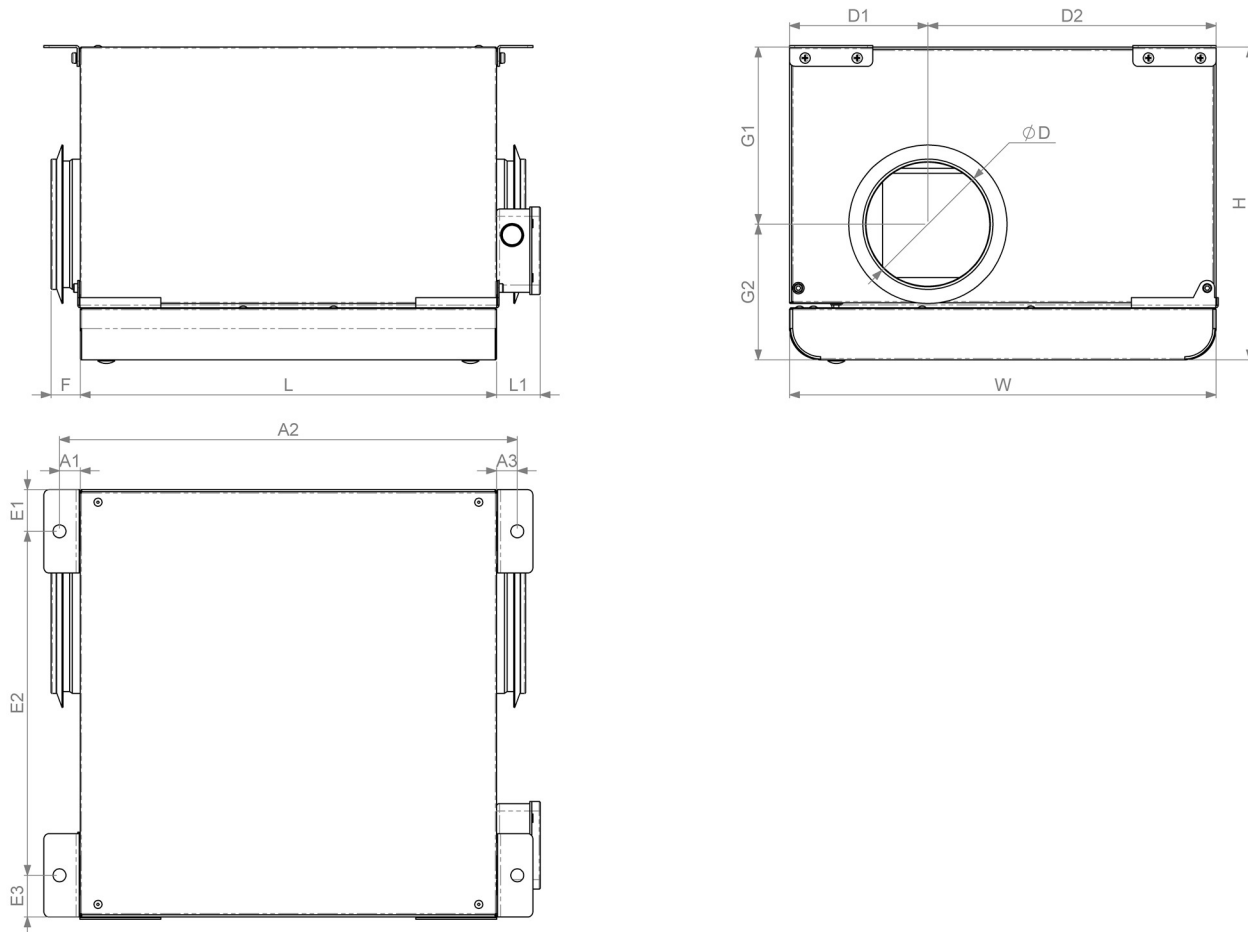

L [mm]	W [mm]	H [mm]	ØD [mm]	L1 [mm]	F [mm]	A1 [mm]	A2 [mm]	A3 [mm]	D1 [mm]	D2 [mm]	E1 [mm]
400	410	300	160	42	28	20	440	20	261	149	40
E2 [mm]	E3 [mm]	G1 [mm]	G2 [mm]								
330	40	141	159								